BILL OF MATERIAL

SHIP MARK	PIECE MARK	QTY	DESCRIPTION	LENGTH	REMARKS
100C1		1	W10X54	12'-10 7/8"	SQ-2 A992
	bp4	1	PL1 1/4"X18"	1'-6"	A36
	p9	1	FL3/4"X7 1/2"	1'-3 1/2"	A36
	p16	1	FL3/4"X12"	1'-5 3/4"	A36
	p25	1	FL3/4"X11 1/2"	1'-5 13/16"	A36
	p104	1	FL3/8"X3"	0'-7"	A36
	p110	1	FL3/8"X6 1/2"	0'-7"	A36
	hs9	1	HSS10.750X0.500	13'-0 1/4"	A500-GR.B
100C2		1	W10X49	43'-6"	SQ-2 A992
	bp5	1	PL1"X14"	1'-4"	A36
	p8	1	FL3/4"X6 1/2"	1'-0 1/2"	A36
	p9	1	FL3/4"X7 1/2"	1'-3 1/2"	A36
	p62	1	PL5/8"X6 5/8"	1'-0 1/2"	A36
	p104	1	FL3/8"X3"	0'-7"	A36
	p105	1	FL3/8"X3"	0'-7"	A36
	p124	1	FL3/8"X4 1/2"	2'-0 1/2"	A36







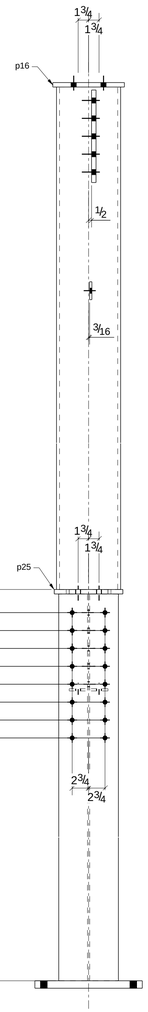

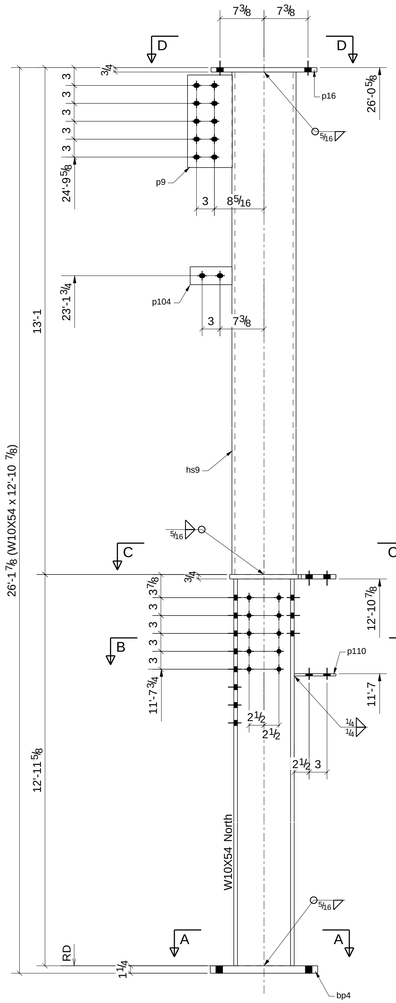

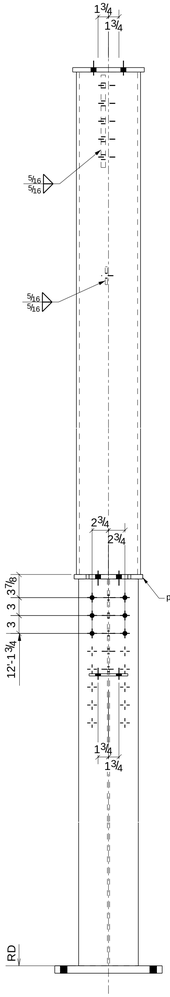



ONE - COLUMN - 100C1

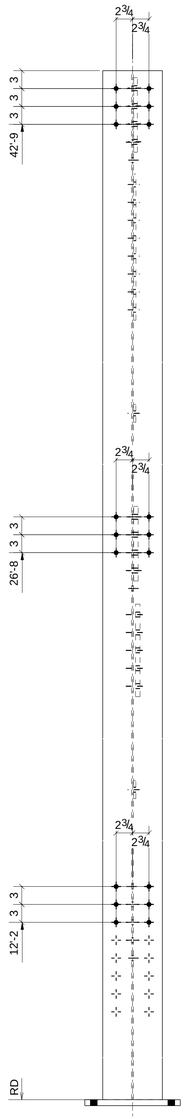

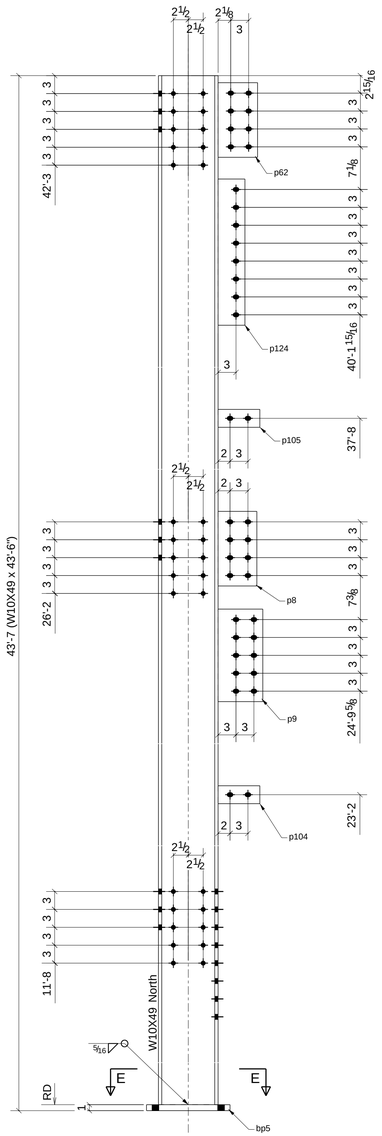



ONE - COLUMN - 100C2

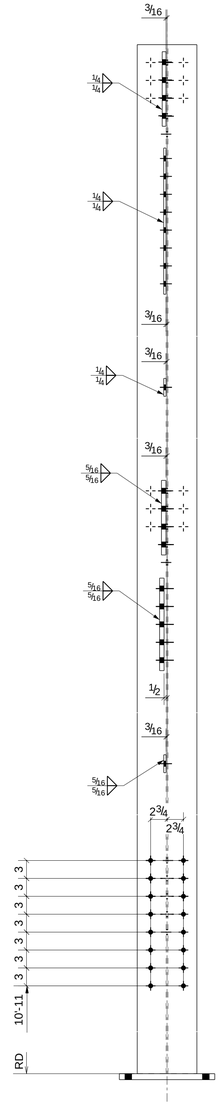

REV.	DATE	DESCRIPTION	BY	CHKD BY
O	12/01/2014	For Fabrication	JSG	N/A
A	10/29/2014	For Approval	JSG	N/A

OPEN HOLES 13/16" U.N.O.

PAINT SP3-STD PRIMER

STATELINE FABRICATORS L.L.C.

908-387-8800

ARCHITECT SPILLMAN
ENGINEER PENNONI INC.

P.O. BOX 619
PHILLIPSBURG, NJ

PROJECT NAME	EASTON CITY HALL
LOCATION	EASTON, PA
CONTRACTOR	BOYLE CONSTRUCTION
DESCRIPTION	SHOP DETAILS
DRAWN BY	JSG
CHECKED BY	N/A
APPROVED BY	N/A

JOB No. 1415

DRG No. 100

Tekla Structures