

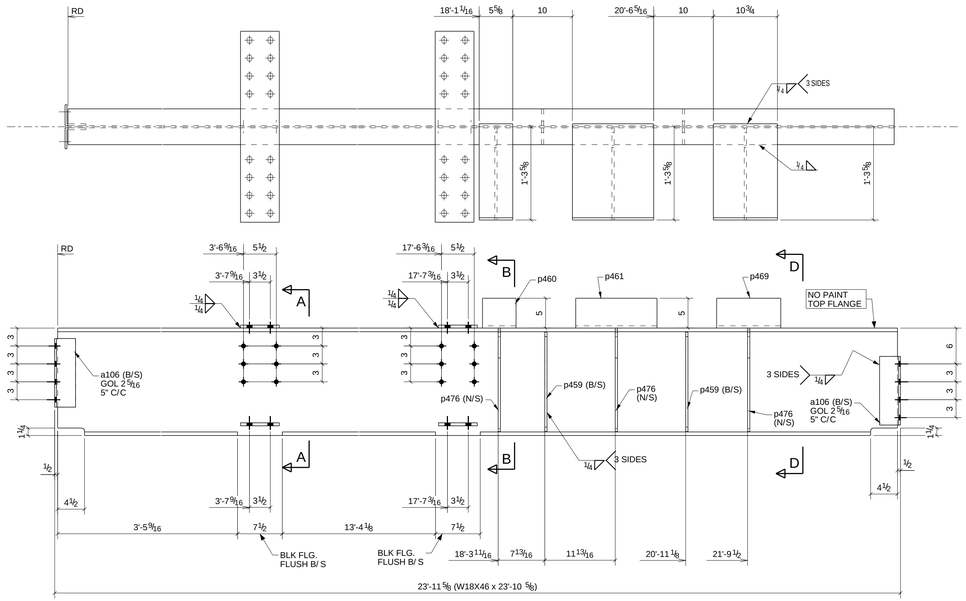

ONE - BEAM - 107B1

1

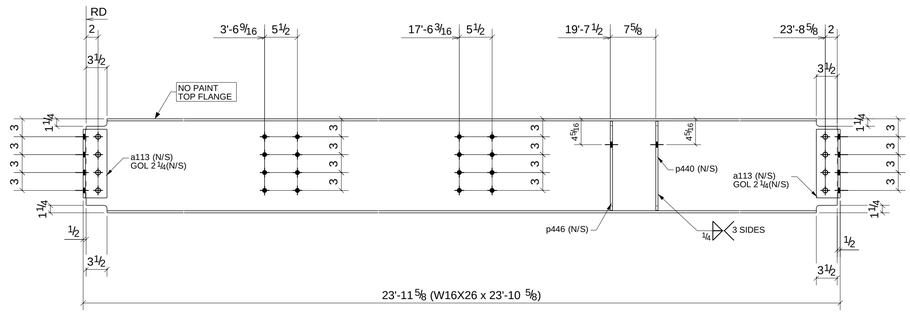

ONE - BEAM - 107B3

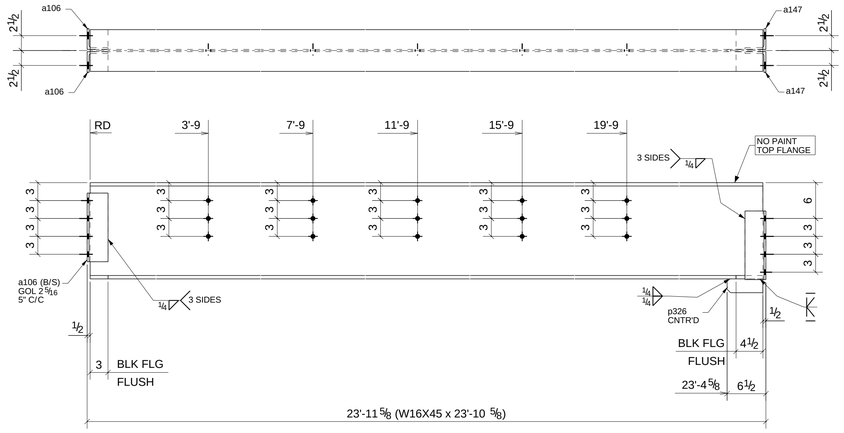

ONE - BEAM - 107B4

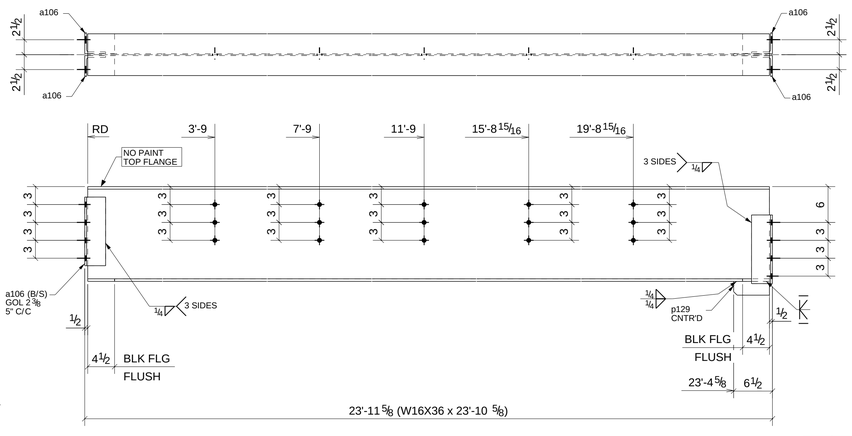

2 - BEAMS - 107B5

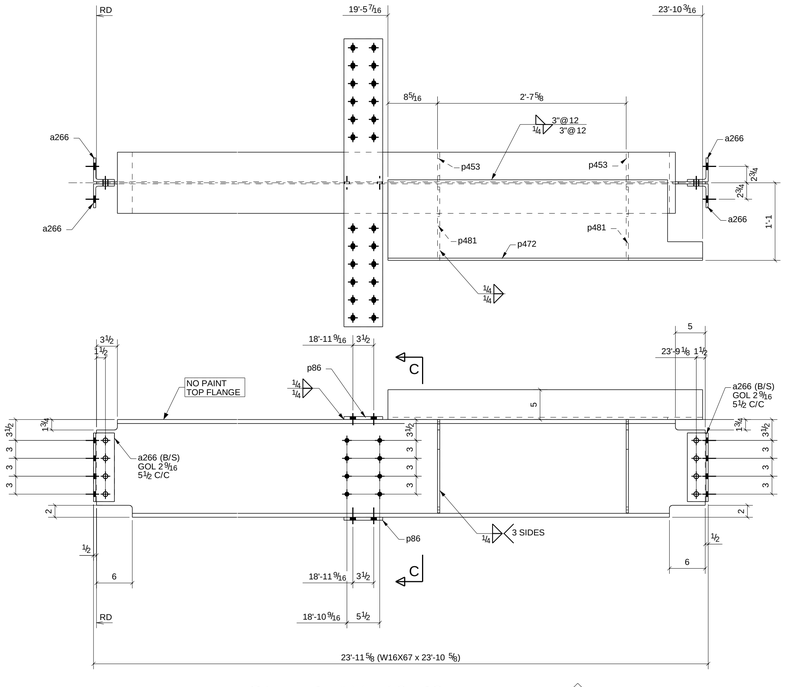

ONE - BEAM - 107B2

1

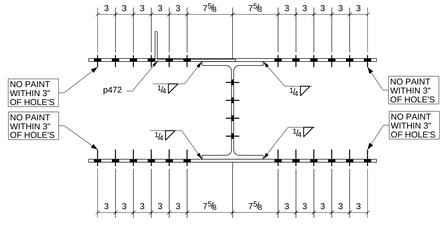

C - C

BILL OF MATERIAL

SHIP MARK	PIECE MARK	QTY	DESCRIPTION	LENGTH	REMARKS
107B1		1	W18X46	23'-10 5/8"	SQ-2 A992
	a106	4	L3-1/2X3-1/2X5/16	0'-11 1/2"	A36
	p101	2	FL1/2"X6 1/2"	2'-8"	A36
	p108	4	FL1/2"X6 1/2"	1'-1"	A36
	p459	4	PL3/8"X2 13/16"	1'-4 11/16"	A36
	p460	1	PL3/8"X5 5/8"	1'-8 3/8"	A36
	p461	1	PL3/8"X13 5/8"	1'-8 3/8"	A36
	p469	1	PL3/8"X10 3/4"	1'-8 3/8"	A36
	p476	3	PL3/8"X15 7/16"	1'-5 5/16"	A36
107B2		1	W16X67	23'-10 5/8"	SQ-2 A992
	a266	4	L4X3-1/2X3/8	0'-11 1/2"	A36
	p86	2	FL1/2"X6 1/2"	4'-0 1/4"	A36
	p453	2	PL3/8"X4 15/16"	1'-2 15/16"	A36
	p472	1	PL3/8"X17 3/4"	4'-4 3/4"	A36
	p481	2	PL3/8"X12 13/16"	1'-3 5/8"	A36
		8	3/4"Ø A325N BOLT	0'-2 1/4"	Workshop
107B3		1	W16X26	23'-10 5/8"	SQ-2 A992
	a113	2	L4X3-1/2X3/8	0'-11 1/2"	A36
	p440	1	PL3/8"X6 15/16"	1'-2 15/16"	A36
	p446	1	PL3/8"X6 15/16"	1'-2 15/16"	A36
		8	3/4"Ø A325N BOLT	0'-1 3/4"	Workshop
107B4		1	W16X45	23'-10 5/8"	SQ-2 A992
	a106	2	L3-1/2X3-1/2X5/16	0'-11 1/2"	A36
	a147	2	L3-1/2X3-1/2X5/16	0'-11 1/2"	A36
	p326	1	PL3/8"X2 5/16"	0'-6"	A36
107B5		2	W16X36	23'-10 5/8"	SQ-2 A992
	a106	8	L3-1/2X3-1/2X5/16	0'-11 1/2"	A36
	p129	2	PL3/8"X2 5/16"	0'-6"	A36

REV.	DATE	DESCRIPTION	BY	CHKD BY
1	01/15/2015	For Revision	JSG	N/A
O	12/31/2014	For Fabrication	JSG	N/A
A	10/29/2014	For Approval	JSG	N/A

OPEN HOLES 13/16" U.N.O.

PAINT SP3-STD PRIMER

STATELINE FABRICATORS L.L.C.
908-387-8800

ARCHITECT SPILLMAN
ENGINEER PENNONI INC.

P.O. BOX 619
PHILLIPSBURG, NJ

PROJECT NAME	EASTON CITY HALL
LOCATION	EASTON, PA
CONTRACTOR	BOYLE CONSTRUCTION
DESCRIPTION	SHOP DETAILS
DRAWN BY	JSG
CHECKED BY	N/A
APPROVED BY	N/A

JOB No. 1415

DRG No. 107

Tekla Structures